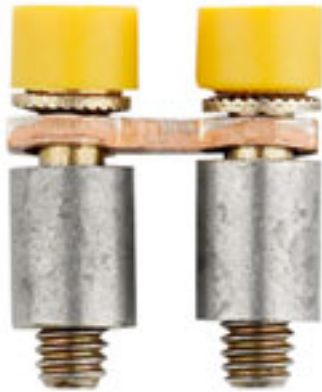


W-Series
Q 2 WDL2.5S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com


Building installation wiring

For building installations, we offer a complete system that revolves around the 10×3 copper rail and comprises perfectly coordinated components: from installation terminal blocks, neutral conductor terminal blocks and distribution terminal blocks to comprehensive accessories such as busbars and busbar holders.

General ordering data

Type	Q 2 WDL2.5S
Order No.	1071500000
Version	W-Series, Cross-connector, For the terminals, No. of poles: 2
GTIN (EAN)	4008190424930
Qty.	50 pc(s).

W-Series
Q 2 WDL2.5S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	4 mm	Width (inches)	0.157 inch
Height	10.1 mm	Height (inches)	0.398 inch
Depth	9.5 mm	Depth (inches)	0.374 inch
Net weight	1.64 g		

Material data

Material	tinned copper	Colour	Yellow
----------	---------------	--------	--------

System specifications

Version	For the terminals	Tightening torque (cross-connector)	0.4...0.8 Nm
Mounting rail	none		

Additional technical data

Explosion-tested version	No	Installation advice	Feed-through (bushing), Direct mounting
Type of fixing	Screwed		

Dimensions

Pitch in mm (P)	6.1 mm
-----------------	--------

PE rating data

Tightening torque range for fixing screw 0.4...0.8 Nm

Rating data

Rated current	24 A
---------------	------

Classifications

ETIM 3.0	EC000489	ETIM 4.0	EC000489
ETIM 5.0	EC000489	ETIM 6.0	EC000489
UNSPSC	30-21-18-01	eClass 5.1	27-14-11-40
eClass 6.2	27-14-11-40	eClass 7.1	27-14-11-40
eClass 8.1	27-14-11-40	eClass 9.0	27-14-11-40
eClass 9.1	27-14-11-40		

Approvals

ROHS	Conform
------	---------

Downloads

Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S