


**SlimFix
SF 5/12 MC NE GE V2**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

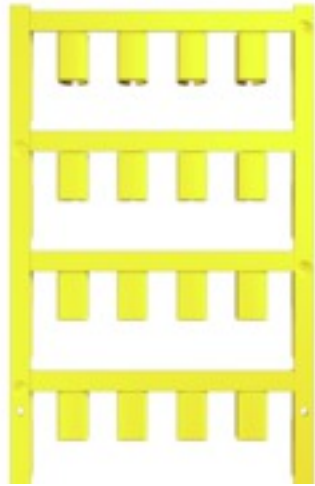

SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

General ordering data

| | |
|--------------------|---|
| Type | SF 5/12 MC NE GE V2 |
| Order No. | 1919620000 |
| Version | SlimFix, Conductor and cable markers, 4.7 - 7.4 mm, 12 x 7.4 mm, Yellow |
| GTIN (EAN) | 4032248556045 |
| Qty. | 160 pc(s). |
| compatible printer | 1324380000 |

SlimFix
SF 5/12 MC NE GE V2

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

| | | | |
|------------|---------|-----------------|------------|
| Width | 7.4 mm | Width (inches) | 0.291 inch |
| Height | 12 mm | Height (inches) | 0.472 inch |
| Depth | 8 mm | Depth (inches) | 0.315 inch |
| Net weight | 0.775 g | | |

General data

| | | | |
|--|---------------------------|-----------------------------|--------------|
| Colour | Yellow | Material | Polyamide 66 |
| Material colour according to resistance code | 4 | Operating temperature range | -40...100 °C |
| Recommended industries | Transportation, Machinery | Size of labelling field | 12x7.4 mm |
| Type of printing | blank | UL 94 flammability rating | V-2 |
| Width | 7.4 mm | | |

Conductor and cable markers

| | | | |
|-------------------------------|-------------------|-------------------------------|-------------------|
| Conductor O.D. | 4.7 - 7.4 mm | Conductor O.D., max. | 7.4 mm |
| Conductor O.D., min. | 4.7 mm | Conductor cross-section, max. | 6 mm ² |
| Conductor cross-section, min. | 4 mm ² | Halogen | No |

Classifications

| | | | |
|------------|-------------|------------|-------------|
| ETIM 3.0 | EC001530 | ETIM 4.0 | EC001530 |
| ETIM 5.0 | EC001530 | ETIM 6.0 | EC001530 |
| UNSPSC | 44-12-17-08 | eClass 5.1 | 27-14-91-03 |
| eClass 6.2 | 27-40-04-01 | eClass 7.1 | 27-14-91-03 |
| eClass 8.1 | 27-14-91-03 | eClass 9.0 | 27-14-07-08 |
| eClass 9.1 | 27-40-04-01 | | |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|------------------|--|
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |
| Software | M-Print PRO configuration file |

Data sheet

SlimFix
SF 5/12 MC NE GE V2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

