IV

**FILLERS** 



## Magic Gel & Magic Fluid

Bicomponent gel with very high dielectric and thermal characteristics, ideal for connection systems (joint shells or enclosures) for power cables

The insulating and sealing gel, when cast in suitable casings, ensures an IP68 degree of protection and it is able to replace all types of resins. This is a self-polymer insulation in two practical bottles or in a single use bag, with cold cross linking. Once poured, the insulation, characterized by very low viscosity, surrounds and envelopes any type of material, cross linking in less than 10 minutes. Completely non-toxic, cross linking with a very slow isothermal peak that does not thermally stress the materials it comes into contact with.

>23 kV/mm **Cross linking time:** 

>2 .  $10^{15} \,\Omega\,cm$ Working temperature:

Dielectric strength:

fast (about 10 min. at 23°C) Volume resistivity:


- For high temperature applications! • Quick cross linking (only 10 minutes)
- Re-enterable also after long working periods
- Non-toxic and safe with no shelf life
- Low viscosity







GEL

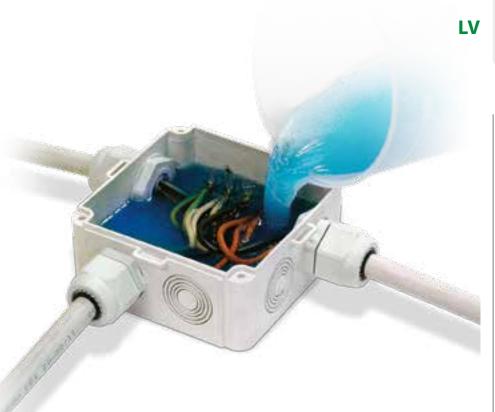

## Magic Gel

Product	Colour	Package type	Total quantity
Magic Gel 300	•	2 bottles	300 ml
Magic Gel 1000	•	2 bottles - 1 small basin - 1 mixing spoon	1000 ml
Magic Gel 2000	•	2 bottles - 1 small basin - 1 mixing spoon	2000 ml
Magic Gel 10000	•	2 tanks - 1 small basin - 1 mixing spoon	10 lt









Magic	Fluid
-------	-------

Product	Colour
Magic Fluid 90	•
Magic Fluid 110	•
Magic Fluid 170	•
Magic Fluid 210	•
Magic Fluid 420	•
Magic Fluid 550	•











<b>Problem ENERGY</b> What does a gel for this type of system have to give?		
	<b>INSULATION:</b> Elevated voltages (1 kV operating, 4 kV testing)	
	<b>THERMAL PERFORMANCE:</b> Operating temperature 90°C, overload temperature 130°C, short circuit temperature 250°C	
V	SEALING: Installations also possible in humid environments, flooded wells	
	DEGREE OF PROTECTION: Must also work with water between the cores of the cable	
	CERTIFIED SYSTEMS: The combination of insulation gel + casing must comply with current standards CEI 20-33 and EN 50393	
Solution: Magic Gel meets all your Energy system requirements!		





