




57.02 57.04



57.02

57.04



Contact specification

Contact form	2Z、2H、2D、4Z、4H、4D
Contact resistance	$\leq 100\text{m}\Omega$ (1A 6VDC)
Contact material	AgCdO AgSnO ₂
Contact capacity	57.02:10A 250VAC/30VDC 57.04 5A 250VAC/30VDC

Technical specification

Insulation resistance	$\geq 500\text{M}\Omega$ (500VDC)
Dielectric strength	Between coil and contact $\geq 1500\text{VAC1min}$
	Between open contacts $\geq 1000\text{VAC1min}$
	Between contacts of different poles $\geq 1500\text{VAC1min}$
Operate / Release time	$\leq 25\text{ms}/25\text{ms}$
Terminal type	PCB and socket mounting


DC Coil data

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VDC	VDC	VDC	$\Omega \pm 10\%$
5	4.0	0.5	28
6	4.8	0.6	40
12	9.6	1.2	160
24	19.2	2.4	640
48	38.4	4.8	2560
110	88.0	11.0	12100

AC Coil data

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VAC	VAC	VAC	$\Omega \pm 10\%$
6	4.8	1.8	12
12	9.6	3.6	42
24	19.2	7.2	168
48	38.4	14.4	675
110	96.0	36.0	3500
220/240	176.0	66.0	14000/16500

Matched Socket

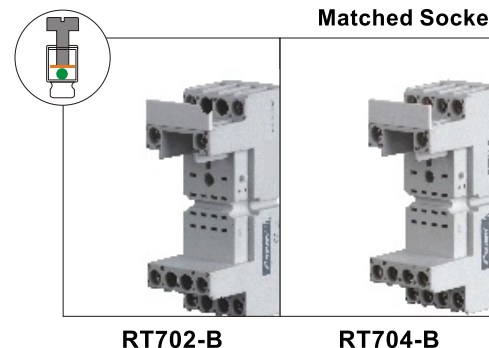

RT702-B

RT704-B


Coil specification

Rated coil power	0.9W / 1.2VA
------------------	--------------


Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

57.02 Outline dimension


57.02 Mounting holes(Bottom view)

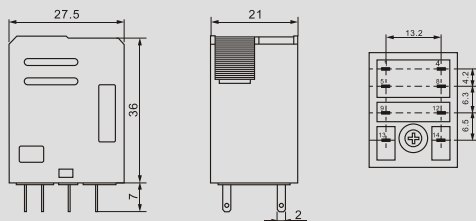


57.04 Outline dimension

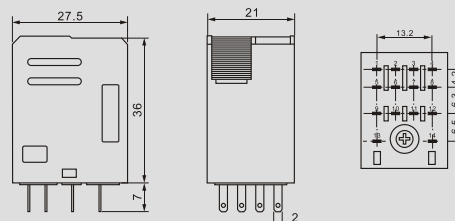

57.02 Wiring diagram(Bottom view)



2Z



4Z