


NOTE:

All 96X96, 72X72 with cover on movement available, see below example.




Cover on Movement




Regular Movement

The meters are adapted to be mounted from the front of panels and then they are equipped with two spring holders, which can be fixed on arbitrary opposite case sides or to be mounted from the rear of panels and then they are equipped with two screw holders which can be fixed on arbitrary, opposite case corners.

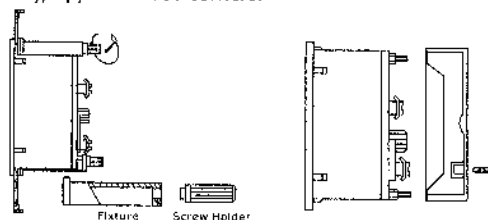

CHANGING THE DIAL

Draw out the dial with a suitable tool introduced in the dial perforation. When replacing the new dial, carefully close the slot of the case with the plastic cover. The dial is changeable without influence to accuracy of DT-A96, DT-A72, DT-A48 DE-A96, DE-A72, DT-M96, DT-M72, DT-2M96, DT-AM96, DT-AM72, DG-AA96, DT-A45, see below Demo.

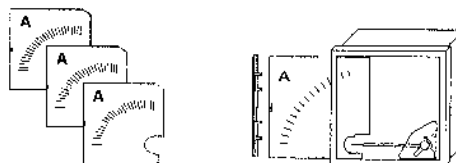

Tips: The dial is changeable without influence to accuracy.


ACCESSORIES DETAILS:

1. - Plastic screw holders..... 2 sets
2. - Brass screw holders (Option)..... 2 sets
3. - Bigger current screw (For Direct input)..... 3 sets
4. - Terminal protection cover..... 1 pc

ACCESSORIES



Larger current screw






Terminal protection cover



Plastic screw handle



Brass screw handle



Frame

Size

Dimension (mm)

	A	B	C	D	E	F
96X96	96	92	90	5.5	65	43
✓ 72X72	72	68	66	5.5	65	43
48X48	48	44	42	5.5	65	43

MOVING IRON

DESCRIPTION

Moving-iron meters are intended for measuring AC current or AC voltage. These meters measure the RMS value and their indications are highly independent of the measured value curve shape.

Ref.

Type	Frame Size(mm)	Mode	Measuring Range	Class Index	Case Qty.(Pcs)	Item Code
Direct Input AC Ammeter			(2In)			
DT-DA96	96X96	-	5~100A	1.5	60	1496000
DT-DA72	72X72	-	5~100A	1.5	100	1472000
DT-DA48	48X48	-	5~50A	2.5	256	1448000
DE-DA96	96X96	-	5~100A	1.5	60	1596000
DE-DA72	72X72	-	5~100A	1.5	100	1572000
DL-DA72	72X72	-	5~100A	1.5	100	1672000
CT Operated AC Ammeter			(2In)			
DT-A96	96X96	x/5A	5~6000A	1.5	60	1960000
DT-A72	72X72	x/5A	5~6000A	1.5	100	1720000
DT-A48	48X48	x/5A	5~6000A	2.5	256	1480000
DE-A96	96X96	x/5A	5~6000A	1.5	60	2960000
DE-A72	72X72	x/5A	5~6000A	1.5	100	2720000
DL-A72	72X72	x/5A	5~6000A	1.5	100	3720000
Direct Input AC Voltmeter			(Vn)			
DT-V96	96X96	-	100~600V	1.5	60	1196000
DT-V72	72X72	-	100~600V	1.5	100	1172000
DT-V48	48X48	-	100~600V	2.5	256	1148000
DE-V96	96X96	-	100~600V	1.5	60	3496000
DE-V72	72X72	-	100~600V	1.5	100	3472000
DL-V72	72X72	-	100~600V	1.5	100	3572000


DEMO



Left slot with end stopper



Top cover removable type



DL-A96

Currently, Top cover removable type is available for CT operated AC Ammeter and Direct input Ammeter and Direct input AC Voltmeter.