

Raychem Heat-shrinkable Medium Wall Halogen-free Insulation Tubing MWTM

Raychem
from TE Connectivity

Raychem Heat-shrinkable Medium Wall Halogen-free Insulation Tubing MWTM

Insulating and sealing systems for power cables have to perform to a range of exacting requirements; to be unaffected by years of weathering and ultra-violet light, to stand up to continuous temperature changes, to keep out moisture and corrosive liquids for a generation, to be immune to oils and solvents, and to combine lasting insulating properties with low weight, toughness, impact strength and flexibility.

The need for modern standards of efficiency and simplicity of installation is a further significant consideration.

To meet these demands, we developed a Raychem heat-shrinkable halogen-free medium-wall tubing MWTM now in widespread use in terminations, joints and cable repairs throughout the world. Heating with a commonly available gas torch activates the tubing's "elastic memory" causing it to recover in diameter. The tubing's high shrink ratio enables it to shrink and tightly fit a wide range of cable sizes and accessories.

Appropriate to the particular application, our MWTM tubing is available with an inner sealant wall, which melts and flows under the heat and shrinking action of installation. This makes it suitable for either cable oversheath replacement and sealing, or uncoated as an insulating material. The shelf-life restrictions usually associated with tapes and resins do not apply, and the completed installation may be taken into service at once.

Raychem tubing MWTM is fast and easily installed, and has proven its long term reliability in harsh climatic conditions and polluted environments. It is one result of our capability in materials science and electrical power engineering, gained through extensive experience as one of the world's largest cable accessories makers and a sustained research effort. We make a wide range of specially developed products and support them with technical service and world-wide experience to meet the demands of the growing world of energy.

An electrical system in Austria.
Raychem tubing MWTM protects and seals the cable cores and connectors as part of a Raychem termination, and seals the cable feedthrough into a building.




Material properties		Test method	Material requirements
Tensile strength		ISO 37	14 MPa min.
Ultimate elongation		ISO 37	350 % min.
Density		ISO 1183 Method A	0.9 – 1.1 g/cm ³
Hardness		ISO 868	50 shore D
Accelerated ageing	7 days at 150°C ± 2°C	ISO 188	
	Tensile strength	ISO 37	14 MPa min.
	Ultimate elongation	ISO 37	300 % min.
Thermal endurance*		IEC 60216	120°C min.
Low temperature flexibility	4 hrs at -40°C ± 3°C	ASTM D 2671 Procedure C	No cracking
Dielectric strength	1 mm wall	IEC 60243	200 kV/cm
Volume resistivity		IEC 60093	1 x 10 ¹² Ω cm min.
Water absorption		ISO 62 Method 1	0.25 % max after 14 days at 23°C ± 2°C
Resistance to liquids	7 days in transformer oil VDE 0370 at 23°C ± 2°C	ISO 1817	
	Tensile strength	ISO 37	14 MPa min.
	Ultimate elongation	ISO 37	300 % min.
Weathering		The material from which MWTM is manufactured contains carbon black to protect it from ultra-violet light.	
Additional properties		Further details are given in Raychem specification PPS 3010/19 (A) [1326].	

* based on ultimate elongation

Ordering information

Dimensions

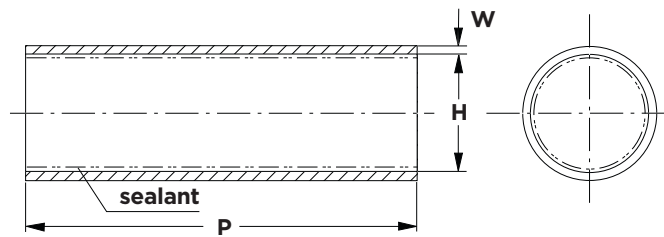

Notes:

- Dimensions in millimeters
a = as supplied
b = after free recovery
- Max. longitudinal change after free recovery:
+5% / -10%

Raychem tubing MWTM is supplied complete with installation instructions.

Product Size	Application range		H		W	
	from mm	to mm	a min	b max	a nom	b min
MWMTM 10/3	3.5	9.0	10	3	0.3	1.0
MWMTM 16/5	5.5	14.5	16	5	0.3	1.4
MWMTM 25/8	9.0	22.5	25	8	0.4	2.0
MWMTM 35/12	13.0	31.5	35	12	0.4	2.0
MWMTM 50/16	18	45	50	16	0.5	2.0
MWMTM 63/19	21	57	63	19	0.6	2.4
MWMTM 75/22	24	68	75	22	0.6	2.7
MWMTM 85/25	28	77	85	25	0.6	2.8
MWMTM 95/29	32	86	95	29	0.7	3.1
MWMTM 115/34	37	104	115	34	0.7	3.1
MWMTM 140/42	46	126	140	42	0.7	3.1
MWMTM 160/50	55	144	160	50	0.7	3.2
MWMTM 180/60	66	162	180	60	0.7	3.2
MWMTM 245/80 *	88	220	245	80	n.a.	2.4
MWMTM 285/135 *	149	255	285	135	n.a.	1.4

* uncoated only

Standard lengths and coatings

Lengths

All sizes types are available in the standard lengths: 1000 mm and 1500 mm.

Spools and other lengths on request.
All lengths subject to standard cutting tolerances.

Coatings

Raychem tubing MWTM is available with or without an inner sealant wall. The sealant exhibits excellent bonding and sealing characteristics to all materials commonly used in the various cable insulation and sheath constructions, such as plastic, rubber, lead and aluminium.
Sealant /S (equivalent /243 and S1323) meets Raychem specification PPS 3012/76

Ordering example

Part number
MWMTM 25/8-1000/S

Product type _____
Size _____
Standard length _____
/S = sealant _____
/U = without sealant _____

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this catalog, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications. Raychem, TE Connectivity and TE Connectivity (logo) are trademarks. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

TE Energy - innovative and economical solutions for the electrical power industry: cable accessories, connectors & fittings, insulators & insulation, surge arresters, switching equipment, street lighting, power measurement and control.

Tyco Electronics Raychem GmbH
a TE Connectivity Ltd. Company
TE Energy
Finsinger Feld 1
85521 Ottobrunn/Munich, Germany

Phone: +49-89-6089-0
Fax: +49-89-6096345

energy.te.com