

管形预绝缘端子

CORD END TERMINALS


NYLON / VINYL INSULATED

Material

Insulation: Nylon、PVC、尼龙

Terminal Body: Copper Tubular 紫铜管


Plating: Tin 镀锡

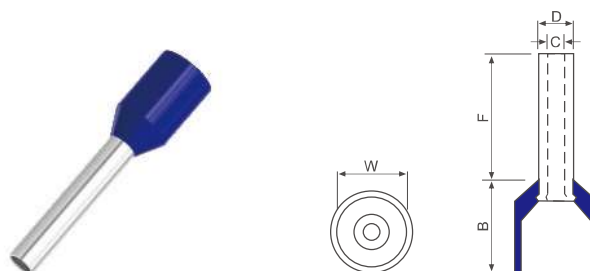

电线规格 WIRE RANGE mm ² (A.W.G.)	型号 ITEM NO.	尺寸 DIMENSION mm(inch)					FRENCH COLOR	GERMAN COLOR	DIN COLOR	包装/只 QTY BAG	
		W	F	B	D	C					
0.25 (26)	E 0206	1.8 (.071)	6.0 (.236)	4.8 (.189)	1.1 (.043)	0.8 (.031)				1000	
	E 0208		8.0 (.315)								
0.34 (24)	E 0306	1.8 (.071)	6.0 (.236)	4.8 (.189)	1.1 (.043)	0.8 (.031)				1000	
	E 0308		8.0 (.315)								
0.5 (22)	E 0506	2.6 (.102)	6.0 (.236)	6.0 (.236)	1.3 (.051)	1.0 (.039)				1000	
	E 0508		8.0 (.315)								
	E 0510		10.0 (.394)								
	E 0512		12.0 (.472)								
0.75 (20)	E 7506	2.7 (.106)	6.0 (.236)	6.5 (.256)	1.5 (.059)	1.2 (.047)				1000	
	E 7508		8.0 (.315)								
	E 7510		10.0 (.394)								
	E 7512		12.0 (.472)								
1.0 (18)	E 1006	3.2 (.126)	6.0 (.236)	6.7 (.264)	1.8 (.071)	1.5 (.059)				1000	
	E 1008		8.0 (.315)								
	E 1010		10.0 (.394)								
	E 1012		12.0 (.472)								
1.5 (16)	E 1508	3.4 (.134)	8.0 (.315)	6.4 (.252)	2.1 (.083)	1.8 (.071)				1000	
	E 1508L	3.7 (.146)	8.0 (.315)	7.2 (.283)	2.0 (.079)	1.7 (.067)					
	E 1510	3.4 (.134)	10.0 (.394)	6.4 (.252)	2.1 (.083)	1.8 (.071)					
	E 1510L	3.7 (.146)	10.0 (.394)	7.2 (.283)	2.0 (.079)	1.7 (.067)					
	E 1512	3.4 (.134)	12.0 (.472)	6.4 (.252)	2.1 (.083)	1.8 (.071)					
	E 1518		18.0 (.709)								
2.5 (14)	E 2508	4.1 (.162)	8.0 (.315)	7.0 (.276)	2.6 (.102)	2.3 (.091)				1000	
	E 2510		10.0 (.394)								
	E 2512		12.0 (.472)								
	E 2518		18.0 (.709)								
	E 2525		25.0 (.984)								
4.0 (12)	E 4009	4.8 (.189)	9.0 (.354)	8.5 (.335)	3.2 (.126)	2.82 (.111)				1000	
	E 4010		10.0 (.394)								
	E 4012		12.0 (.472)								
	E 4018		18.0 (.709)								

管形预绝缘端子
CORD END TERMINALS
NYLON / VINYL INSULATED

Material
Insulation: Nylon、PVC、尼龙
Terminal Body: Copper Tubular 紫铜管
Plating: Tin 镀锡

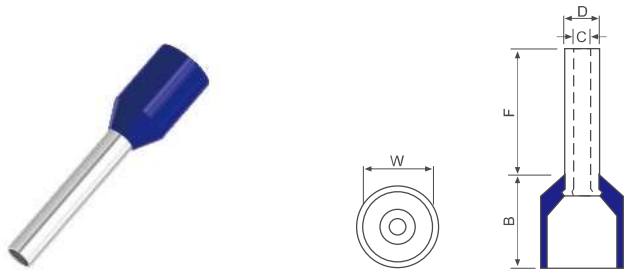

电线规格 WIRE RANGE mm ² (A.W.G.)	型号 ITEM NO.	尺寸 DIMENSION mm(inch)					FRENCH COLOR	GERMAN COLOR	DIN COLOR	包装/只 QTY BAG
		W	F	B	D	C				
6.0 (10)	E 6012	6.1 (.240)	12.0 (.472)	8.5 (.335)	3.9 (.154)	3.5 (.138)	Green	Black	Yellow	1000
	E 6018		18.0 (.709)							
10.0 (8)	E 10-12	7.4 (.291)	12.0 (.472)	10.0 (.394)	4.9 (.193)	4.5 (.177)	Brown	Ivory	Red	1000
	E 10-18		18.0 (.709)							
16.0 (6)	E 16-12	8.9 (.350)	12.0 (.472)	11.0 (.433)	6.2 (.244)	5.8 (.228)	Ivory	Green	Blue	500
	E 16-18		18.0 (.709)							
	E 16-22		22.0 (.866)							
25 (4)	E 25-12	10.7 (.421)	12.0 (.472)	12.0 (.472)	7.9 (.311)	7.5 (.295)	Black	Brown	Yellow	250
	E 25-16		16.0 (.630)							
	E 25-22		22.0 (.866)							
35 (2)	E 35-16	12.2 (.480)	16.0 (.630)	14.0 (.551)	8.7 (.343)	8.3 (.327)	Red	Beige	Red	250
	E 35-18		18.0 (.709)							
	E 35-25		25.0 (.984)							
50 (1/0)	E 50-18	14.7 (.579)	18.0 (.709)	16.0 (.630)	10.9 (.429)	10.3 (.406)	Blue	Olive	Blue	250
	E 50-20		20.0 (.787)							
	E 50-25		25.0 (.984)							
70 (2/0)	E 70-20	16.2 (.638)	20.0 (.787)	16.2 (.638)	14.3 (.563)	13.5 (.531)	Yellow	Yellow	Yellow	100
	E 70-22		22.0 (.866)							
	E 70-25		25.0 (.984)							
95 (3/0)	E 95-25	18.3 (.720)	25.0 (.984)	18.8 (.740)	15.3 (.602)	14.5 (.571)	Red	Red	Red	100
	E 95-27		27.0 (1.063)							
	E 95-30		30.0 (1.181)							